




Classic Style, Exquisite And Perfect

- Symmetric frame, slim body
- Screen-splitting display
- FHD display

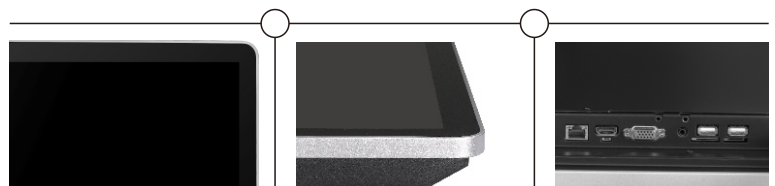

W8 Function

Symmetric frame, slim body

Ultra-narrow frame design, flexible body and beautiful and simplified appearance.

1080p high-definition display

1920×1080 high-definition resolution, high brightness and high dynamic contrast can present shocking visual effect.

Central management

Realize central setting via a management system.

Freely select and display on different split screens

Split screen and freely select contents to play in different areas, including video, image, text, weather forecast and enterprise logo.

Automatic recovery

Adopt single chip internal watchdog, auto recovery in abnormality; Concentrate setting up and manage digital signage via management system.

Breakpoint memory

Support breakpoint resume and timed download, realizing a rational occupation of network bandwidth.

Rich play mode

Receive media content from the network, store locally and support different play modes including cycleplay, intercut, timing play, and background play.

Multiple caption scrolling mode

Support Chinese and English scrolling caption, provide multiple optional caption scrolling directions and modes, attracting more attention.

W8 Parameters

| Specification | 32W8LN | 43W8LN | 55W8LN |
|---------------------------|--|----------------------|----------------------|
| Display parameters | | | |
| Panel size | 32" | 43" | 55" |
| LCD type | LED | LED | LED |
| Bare dimension (mm) | 760×47.5×460 | 1003×62.6×598 | 1280×60.8×760 |
| Packing dimension (mm) | 920×190×625 | 1200×210×785 | 1520×245×965 |
| Power consumption | ≤70w | ≤75w | ≤90w |
| Operating voltage | 100v-240VAC, 50/60Hz | 100v-240VAC, 50/60Hz | 100v-240VAC, 50/60Hz |
| Optimum resolution | 1920×1080@60Hz | 1920×1080@60Hz | 1920×1080@60Hz |
| Viewing angel | 178°,178° | 178°,178° | 178°,178° |
| Brightness | 350cd/m ² | 450cd/m ² | 450cd/m ² |
| Contrast ratio | 1400:1 | 1100:1 | 1100:1 |
| Response time | 6ms | 12ms | 12ms |
| Color | 16.7M | 16.7M | 16.7M |
| Sound configuration | 10w+10w | 10w+10w | 10w+10w |
| Program | Standard configuration of Android/PC(optional) | | |
| Touch | Standard configuration without touch/touch(optional) | | |
| External interface | | | |
| TF | ×1 | ×1 | ×1 |
| RJ-45 | ×1 | ×1 | ×1 |
| USB | ×2 | ×2 | ×2 |
| SIM | ×1 | ×1 | ×1(optional) |
| 3G | ×1 | ×1 | ×1(optional) |
| HDMI-OUT | ×1(output) | ×1(output) | ×1(output) |
| VGA-OUT | ×1(output) | ×1(output) | ×1(output) |
| AUDIO-OUT | ×1(output) | ×1(output) | ×1(output) |

Manufacturing strength | Quality control | After sales service

Commercial company production line



Module production line



Commercial display product assembly line



Professional display product assembly line

iSEMC commercial advantage



Screen resource

LGD PD general agent.
Low-cost self-produced screen.



Factory manufacturing

Reliable quality.
Assembly professional production.
Meet differentiated needs.



Technical services

Complete range of products.
Meet differentiated needs.



Cooperation mode

Focus on OEM, low marketing costs.
Flexible and diverse.



Beijing Lema Technology Co.,Ltd.

Tel:+86 10 61706912 | Fax:+86 10 61706912
Email:info@isemc.com | Website:www.isemc.com